

ISO 9001
Certified



Zimmer™

LPG Vaporizer



algas-sdi.com

LPG Vaporizer


ZimmerTM is the most innovative, easy-to-use, and reliable small capacity LPG vaporizer in the world. Our patented technology provides the marketplace quality and affordability.


When quality, simplicity and value are your priorities,

just choose Zimmer.TM

Key Points

- ➔ Dry electric design
- ➔ Self-regulating heaters match heat output to LPG usage
- ➔ No switches, thermostats, floats or relays to fail
- ➔ Expect 3 to 5 years of NO maintenance!
- ➔ Voltage options: 100-240VAC or DC
- ➔ Explosion-proof – Class I, Div 1, Gr D; Ex d IIA T3 Gb, Ex II 2G
- ➔ Approved by UL/Demko; CE and ATEX marked
- ➔ Corrosion-resistant heat exchanger

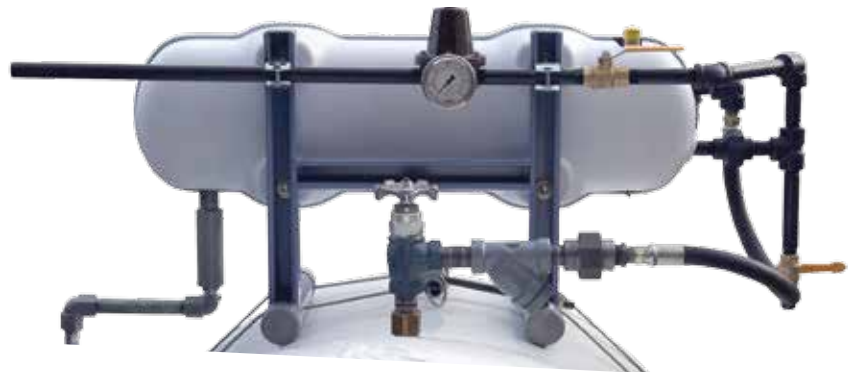

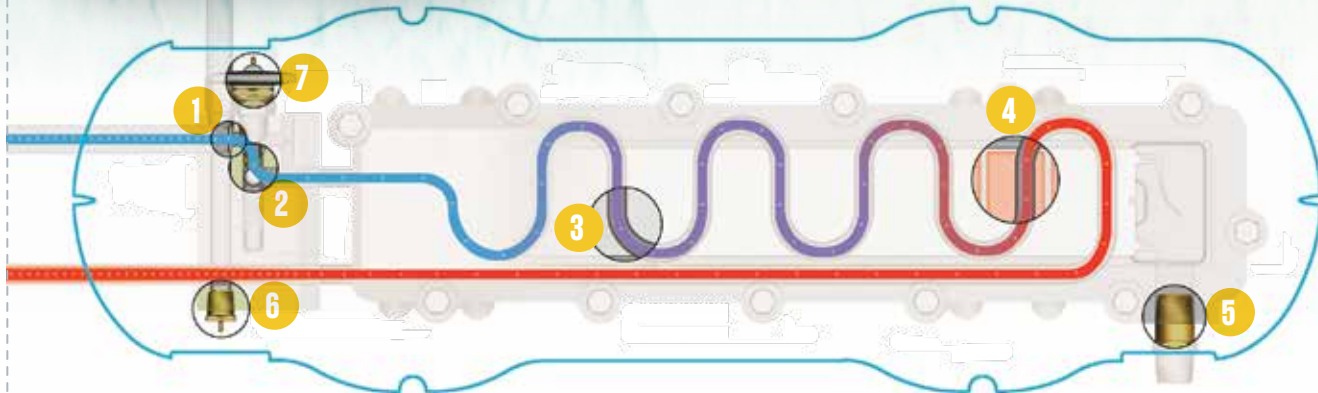

Step 1

Liquid LPG enters the vaporizer via an inlet control valve.

Step 2

The control valve's inverted, metal-to-metal seat provides durability while preventing debris from collecting on the valve seat.

Step 3

Liquid LPG enters the steel heat exchanger tubes cast into the aluminum body. The steel tubes provide

a secure pressure boundary and enhance heat transfer.

Step 4

Self-regulating heaters replenish energy extracted during the vaporization process. The unique design prevents overheating and uses NO temperature sensors, relays, or similar control devices.

Step 5

Accepts AC or DC power.

Step 6

The temperature of the LPG vapor exiting the vaporizer is monitored by a temperature sensitive bulb. This bulb provides feedback to the inlet control valve.

Step 7

The inlet control valve modulates the flow of liquid LPG into the vaporizer relative to the vapor exit temperature to ensure complete vaporization occurs.

Operational Overview

Zimmer is comprised of an electrically heated aluminum heat exchanger, packaged within an aesthetically pleasing, UV protective thermoplastic resin enclosure. The entire vaporizer assembly weighs approximately 65 lbs (30 kg) and is fully self-contained. To say **Zimmer** is easy to use is an understatement.

End users benefit from **Zimmer**'s minimal space requirements and flexible mounting configurations. Typical applications include commercial kitchens, small light industrial loads, mobile requirements and high-end residential users. With **Zimmer**, your LPG tank will provide consistent trouble free vapor supply, day-in and day-out.

IDEALLY SUITED FOR:



Hotels & Resorts



Poultry Farms



Hog Barns



Ski Areas



Restaurants



Small Factories



Construction Zones



Buses



HVOF Coatings

Start Up: 30 – 50 minutes depending on temperature

Zimmer™ Specifications

Vaporizer Type/Model:	Electric Model Z40			
Electrical Information: 100-240v 50-60 hz	Voltage	Phase	1Watts	Amps
	2120	1	3,270	27.3
	208	1	4,510	21.7
	220	1	4,680	21.3
	240	1	4,680	19.5
Hazardous Area Classification:	Ex d IIA T3 Gb, II 2 G Class I, Division 1, Group D T3			
Approvals:	UL, CE, DEMKO, ³ PED, ATEX			
⁴Vaporization Capacity:	1.82 MMBTU/h (20 US Gal/h)	0.448 MMkcal/h (40 kg/h)		
Heat Exchanger:	Relief Valve Set Point:	250 PSIG	17.2 Barg	
	⁵Design Pressure:	250 PSIG	17.2 Barg	
	⁶Proof Pressure:	1250 PSIG	86.2 Barg	
Unit Dimensions:	31.1" L x 10.3" H x 6.4" W 791mm L x 260 mm H x 163.mm W			
Shipping Weight:	70 lbs. 32 kg			
Shipping Dimensions:	35"L x 15"W x 12"H 889mm L x 381mm W x 305mm H			
Optional Accessories:	Wall Mount Kit, Tank Mount Kit, Valve and Strainer Kit, Outlet Regulator			



- ¹ Wattages shown reflect peak consumption. Vaporizer power consumption modulates to LPG input rate. Electrical Consumption: 0.1 kWh./kg vaporized.
 - ² Continuous vaporization capacity at 120V is 25% less than shown.
 - ³ PED is per 'Standard Engineering Practice' SEP.
 - ⁴ LPG composition effects rated capacity. Note that alternative models and capacities are **only available** in certain countries **outside** the USA and Canada. Contact your Sales Manager for details.
 - ⁵ Max Allowable Working Pressure or MAWP.
 - ⁶ Pressure the product is capable of withstanding without suffering permanent damage such as deformation, bending or warping of the material.
- Note:** LPG containing asphaltenes, paraffins or similar substances will impact performance.

Algas-SDI developed its first vaporizer in 1932. Over eighty years later, we still lead the market in quality, innovation and **commitment to purpose**. Our products allow businesses located off the gas grid or under curtailment, to operate. We eliminate downtime ensuring **workers can work and goods and services can flow to market**.



151 S. Michigan Seattle, WA USA 98108
P 206-789-5410 | F 206-789-5414
sales@algas-sdi.com



algas-sdi.com

ZIM-06/2017

Zimmer™ is a Trademark of Algas-SDI, LLC.

