



ISOMETRIC VIEW
NO SCALE

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES [mm].
 2. VAPORIZER PRESSURE VESSEL RATED AT 290 PSIG [20 BAR] MAWP.
 3. VAPORIZER RELIEF VALVE SETTING 250 PSIG [17.2 BAR].
 4. cULus APPROVED.
 5. CE MARKED (PED).
 6. VAPORIZER CAPACITY AT 0°F AND 100 PSIG PROPANE INLET CONDITION 480 GPH [960 KG/HR].
 7. VAPORIZER TO BE SECURED THROUGH THE FOUR MOUNTING HOLES ON ABOVE GROUND, LEVEL, SOLID, NON-COMBUSTIBLE BASE.
 8. HEAT INPUT 540,000 BTU/HR [569,730 KJ/HR].
 9. USE THE 1/8" FNPT PORT TO PIPE AWAY 1ST STAGE VENT IF REQUIRED.
 10. USE THE 3/4" FNPT PORT TO PIPE AWAY 2ND STAGE VENT IF REQUIRED.
 11. APPROXIMATE SHIPPING WEIGHT 1242 LBS [563 KG].

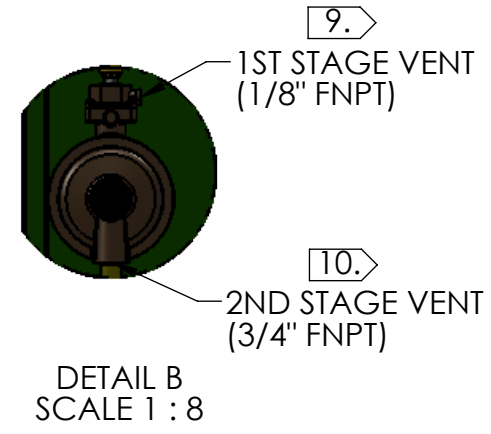

TOLERANCES
UNLESS OTHERWISE SPECIFIED

.X ±
.XX ±
.XXX ±

ANGLE ±0°30'
FRACTIONS ± 1/4"



Drawn By: A. FIGLIOLI
Checked By: DN
Approved By:
Date: 4/1/10
Scale: 1:24 AND NOTED
Job #: A.S.D.I. STD.